

Precision Position Sensors & Potentiometers for Industrial Automation

Trusted by Industry Since 1959



Pankaj

ISO 9001:2015 Certified Company



MULTI WIRE CONDUCTIVE PLASTIC POTENTIOMETER MW-CP-20

- 20 mm square housing made of strong glass reinforced engineering plastic
- 5 mm Diameter spring return plunger
- Flange mounting
- 10 mm or 20 mm Electrical travel
- Bellow on Plunger
- Gold Plated PCB Terminals
- Precious Metal Multi Wire wiper contact
- Long life
- Infinite resolution
- IP 68 Tested




NEW

SHORT STROKE CONDUCTIVE PLASTIC POTENTIOMETER



LCP - 10 10 mm Travel
LCP - 20 20 mm Travel

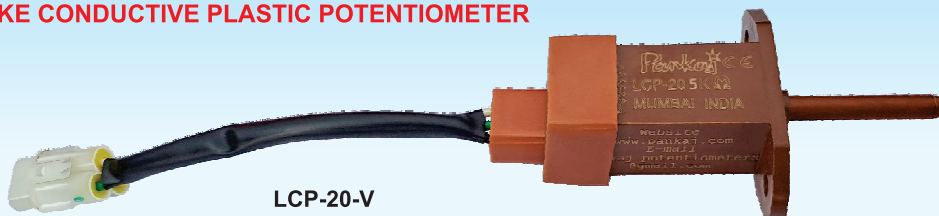

LCP-20-V

20mm Sq., flange mounting
Resistance: 1K, 5K, 10KΩ
Supplied with wires and connector

NEW

RCP-35-A



35mmφ, 24.5mm Height,
Shaft 6mmφ, 15mm long,
360° Mech., 355° Elec. Rotation
Resistance: 1K, 5K or 10KΩ

NEW

RCP-35-AG



ROTARY CONDUCTIVE PLASTIC SERVO POTENTIOMETER

RCP-50-A



50mmφ, 24.5mm Height,
Shaft 6mmφ, 15mm long,
360° Mech., 355° Elec. Rotation
Resistance: 1K, 5K or 10KΩ
C-Clamp Mounting

NEW




HOLLOW SHAFT VERSION

HSCP-50-A




50mmφ, 24.5mm Height,
Hollow Shaft 6mmφ,
360° Mech., 355° Elec. Rotation
Resistance: 1K, 5K or 10KΩ
C-Clamp Mounting

NEW



SINGLE TURN CONDUCTIVE PLASTIC POTENTIOMETER

SCP-25



25mmφ, 18mm Height
Resistance: 1K, 5K, 10KΩ

ROTARY CONDUCTIVE PLASTIC SERVO POTENTIOMETER RCP-22



Bush Mounting



Aluminium Housing
Metal Shaft
Mech.
Elec.



Servo Mounting




Ø 22 mm x L 12 mm
Ø 6.35 mm x L 15 mm
360°
(1) 340° (2) 100° (3) 60°

NEW

NEW

NEED A CUSTOM POTENTIOMETERS?
WE DESIGN AND MANUFACTURE PRODUCTS TO YOUR EXACT ELECTRICAL & TECHNICAL REQUIREMENTS.

MILITARY GRADE, IP 65

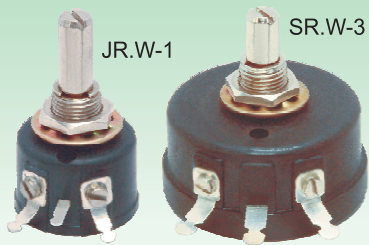

ENGINEERING-GRADE HIGH STRENGTH PLASTIC SHAFT



1 Watt Res. 25 to 25K ohms
Body Size $\varnothing 24 \times 16$ mm




3 Watt Res. 25 to 25K ohms
Body Size $\varnothing 40 \times 20$ mm



SINGLE TURN WIRE WOUND POTENTIOMETERS



1 Watt Res. 25 to 25K ohms
Body Size $\varnothing 24 \times 16$ mm



3 Watt Res. 25 to 25K ohms
Body Size $\varnothing 40 \times 20$ mm



5 Watt Res. 25 to 50K ohms
Body Size $\varnothing 48 \times 28$ mm




7.5 Watt Res. 25 to 50K ohms
Body Size $\varnothing 48 \times 38$ mm



15 Watt Res. 25 to 50K ohms
Body Size $\varnothing 91 \times 38$ mm

LINEAR MOTION CONDUCTIVE PLASTIC POTENTIOMETERS

LMP-CP-50..250

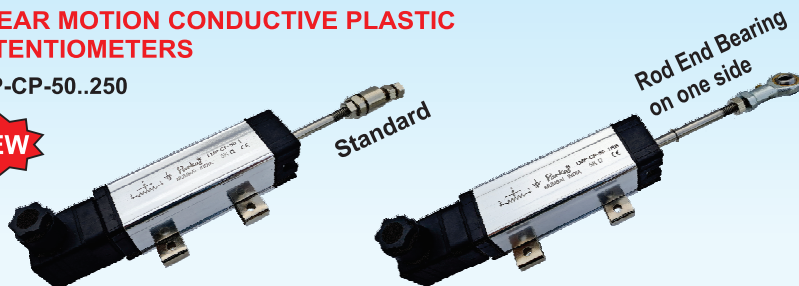

Optional

Rod-End Bearing on One Side
Rod-End Bearings on Both Sides
External Spring Return
Internal Spring Return

32 x 32 mm anodized aluminum housing, Stainless-steel rod, connector output, Resistance Value 1K, 5K & 10K Ohms
Adjustable mounting brackets

PEDAL-OPERATED POTENTIOMETERS WITH SWITCH



POP-0417

Switch 10 Amp.
Pedal Potentiometer 5K Ω
Resettable Potentiometer 5K Ω

FOOT OPERATED POTENTIOMETER WITH SWITCH

FOP-5K / 10K

Foot Potentiometer
FPM



Standard-Type



Flat-Type



Dome-Type

Switch Rating: 10Amp. @ 230VAC, 2NO + 2NC
Potentiometer: 1K, 5K or 10K Ω

Foot Controller Plastic
FCP-5K



For detailed specifications, dimensions and CAD models, visit www.pankaj.com

Designers, Manufacturers & Exporters of Precision Potentiometers



Pankaj POTENTIOMETERS PVT. LTD.

201-B, 217, 218 Udyog Mandir No.1, Pitamber Lane, Mahim, Mumbai 400016, India.
Phone: + 91 22 31633520 E-mail: pankaj.potentiometers@gmail.com

