



MAKE IN INDIA



Single Turn Conductive Plastic Potentiometers Model: SCP-25

Conductive Plastic Single Turn Panel Mounting Potentiometers SCP-25 from PANKAJ offers long rotational life, stable output in wide temperature range, high moisture environment, with infinite resolution for manual or mechanized application in variety of fields e.g. Drives, Automation etc.

Features

- Infinite Resolution, low CRV
- Gold Plated Wiper & PCB
- Long Rotational Life
- Sturdy Construction
- Brass Nickel Plated Bush and Shaft

Electrical Specifications

Standard Resistance Values 1KΩ, 5KΩ, 10KΩ, 100KΩ, 220KΩ **Resistance Range** Standard $\pm 25\%$ ± 15% Special 1 Watt @ 40°C Power Rating **Essentially Infinite** Resolution 1 Lakh Shaft Revolutions Rotational Life Expectancy ±500 ppm/°C Temp. Coefficient of Resistance 1 mA Maximum Wiper Current 300° Effective Electrical Angle Min. 1000 VAC for 1 minute Dielectric Strength at Sea Level 0° to 100°C Temperature Range



Mechanical Specifications

Housing Diameter	25 mm
Housing Height	12 mm
Shaft Diameter	6.3 mm
Shaft Length	19 mm or 25 mm
Mounting	Bush 3/8" x 32 TPI, 10 mm Long
Mechanical Angle of Rotation	330°


- Thermoplastic Housing
- Relimate Connector Compatible Termination
- Various Shaft Lengths and Designs

Single Turn Conductive Plastic Potentiometers Model: SCP-25

Product Image





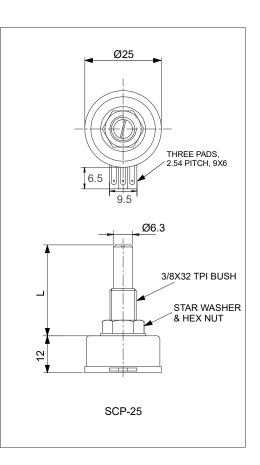

Applications

- Automation
- AC/DC Motor Drives
- Process Control Equipments
- Test and Measuring Instruments
- Control Panels
- Offset Settings & many more.

Ordering Information Example: SCP-25, 1K, 19 mm

Model No.	Resistance Value in ohms	Shaft Length in mm
SCP-25	1K, 5K, 10K, 100K, 220K	19 mm or 25 mm as required

Note: We reserve the right to make any kind of design, specifications or functional modification at any moment without prior notice